
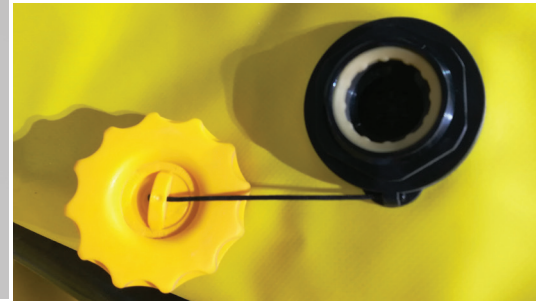
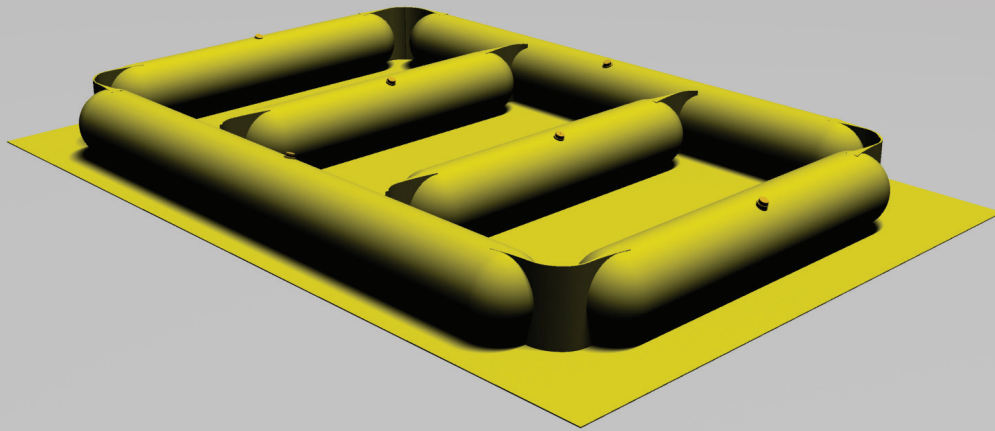


STORAGE
TEMPORARY STORAGE TANK

ScorTank DT-5

TANK FEATURES

- Quick set-up
- Multi-compartment decontamination system ideal for multi-stage decon
- Robust build
- Resistant to wear, tear and hydrocarbon damage
- Compact storage



The ScorTank DT-5 Modular Decontamination Tank is an air-inflated decontamination unit that features three separate compartments. The tank is suitable for the collection of hazardous runoffs, specifically hydrocarbons, and is ideal for decontamination after oil spill response operations. The tank features inflatable air walls that can be rapidly filled with air for immediate use in emergency operations. Monsun valves are easy to operate and are suitable to use with most air inflators, including the New Naval Air Inflator.

- The capacity of the tank is 5m³
- The dimensions of the inflated tank are: 5.00 x 3.00 x 0.50 m
- The tank is manufactured from Polymer Alloy Coated Polyester
- The fabric is resistant to sea-water, UV radiation, chemical dispersant and hydrocarbons
- The tank folds up neatly for transportation and storage
- The system is designed to be easily cleaned

TECHNICAL SPECIFICATIONS

Capacity	5m ³
Base Fabric	Polymer Alloy Coated Polyester 1000 gr/m ²
Length	5.00 m
Width	3.00 m
Height	0.50 m
Air Valve	Monsun Air Valve

ENVIRONMENTAL USES

- Beaches
- Nearshore
- Ports & Harbors
- Off-shore
- Vessels

TANK PACKAGE

- ScorTank
- ScorSafe Ground Mat (30,100)
- Air Inflator
- Air Hoses
- Absorbents

