



Pumps
Transfer Pumps

Centrifugal Pump




New Naval

The Centrifugal Transfer Pump is a robust transfer pump with versatile applications including oil spill response operations, dewatering, tank cleaning procedures and many other tasks where pumping and transfers of various liquids take place. This economic pump employs a durable design making it ideal for long-term use and consistent performance. It is light-weight and compact making the pump ideal for operations where portability and ease of transport are necessary. The pump can maintain a capacity up to 35 m³/hour.



Performance of Engine Driven Dewatering Pumps

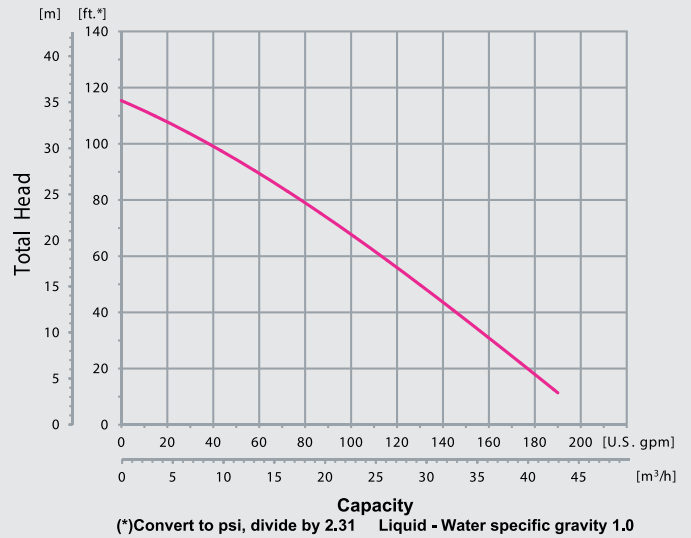

(*)Convert to psi, divide by 2.31 Liquid - Water specific gravity 1.0

TECHNICAL SPECIFICATIONS

Model	AMT
Nameplate Capacity	35 m ³ /h
Total Head Lift	35m
Self-Priming Lift	6m
Dimensions (LxWxH)	408 mm x 491 mm x 408 mm
Weight Dry	31 kg
Solids Size (max.)	6 mm
Pump Speed (min. - max.)	960-1450 rpm
Inlet/Outlet Port	2" Camlock

TECHNICAL DATA

The pump is equipped with a built-in check valve and enables constant self-priming to 6m (20 ft). It is driven by an air-cooled, one-cylinder four-stroke diesel engine. It comes with a Semi-open, clog resistant impeller. Installed on a heavy-duty steel base. The hose inlet and outlet transfer connections are 2" in diameter.

KEY FEATURES:

- Thermoplastic construction for portability and durability
- Self-priming up to 6m (20 ft)
- Compact, light-weight design
- Versatile applications
- Ideal for dewatering operations

PUMP APPLICATIONS:

- Liquid Transfer
- Dewatering
- Lightering

EQUIPMENT OPTIONS:

- Skimmer
- Temporary Storage
- Hydraulic Hoses
- Transfer Hoses