
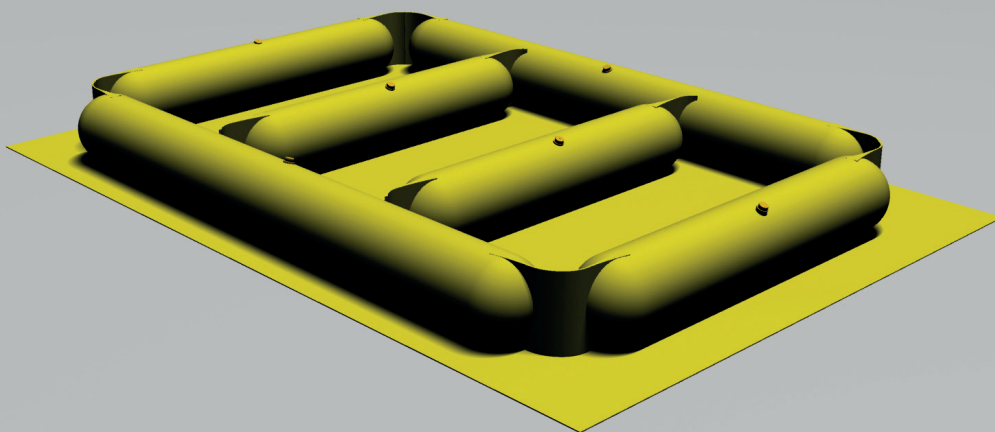


# ScorSafe Decon. Unit (5)

## TANK FEATURES

- Quick set-up
- Multi-compartment decontamination system ideal for multi-stage decon
- Robust build
- Resistant to wear, tear and hydrocarbon damage
- Compact storage



The ScorSafe Decon. Unit (5) is a modular, air-inflated decontamination unit that features three separate compartments. The tank is suitable for the collection of hazardous runoffs, specifically hydrocarbons, and is ideal for decontamination after oil spill response operations. The tank features inflatable air walls that can be rapidly filled with air for immediate use in emergency operations. Monsun valves are easy to operate and are suitable to use with most air inflators, including the New Naval Air Inflator.

- The capacity of the tank is 5m<sup>3</sup>
- Ideal system for 3-stage decontamination procedure
- The tank is manufactured from Polymer Alloy Coated Polyester fabric
- The fabric is resistant to sea-water, UV radiation, chemical dispersant and hydrocarbons
- The tank folds up neatly for transportation and storage
- The system is designed to be easily cleaned

## TECHNICAL SPECIFICATIONS

Capacity	5m <sup>3</sup>
Base Fabric	Polymer Alloy Coated Polyester Fabric 1000 gr/m <sup>2</sup>
Length	5.00 m
Width	3.00 m
Height	0.50 m
Air Valve	Monsun Air Valve

## ENVIRONMENTAL USES

- Beaches
- Nearshore
- Ports & Harbors
- Off-shore
- Vessels

## TANK PACKAGE

- ScorTank
- ScorSafe Ground Mat (30,100)
- Air Inflator
- Air Hoses
- Absorbents

