





Pumps
Transfer Pumps

Spate Pump (electric driven)



New Naval

The Spate Pump is the ideal electric driven, diaphragmatic transfer pump designed for versatile applications including oil spill response operations, dewatering, tank cleaning procedures and many other tasks where pumping and liquid transfers take place. The pump has a double diaphragm that provides powerful suction along with oil and water emulsion prevention, allowing rapid gravity separation after pumping. The main advantage of the pump is its extremely light weight making it easy to handle, transport and position in emergency operations. The pump has a 30 m³/h capacity and can manage up to 6 mm in diameter solids particles.

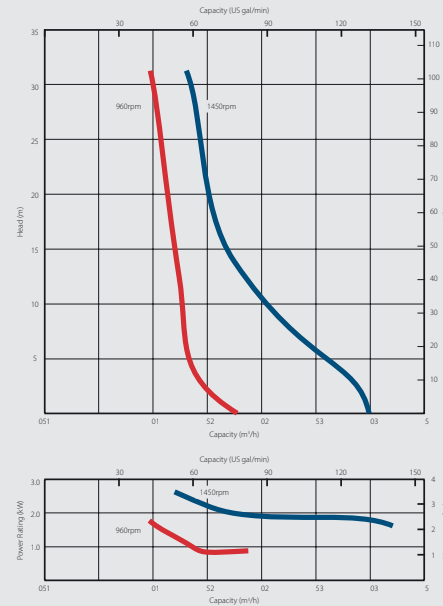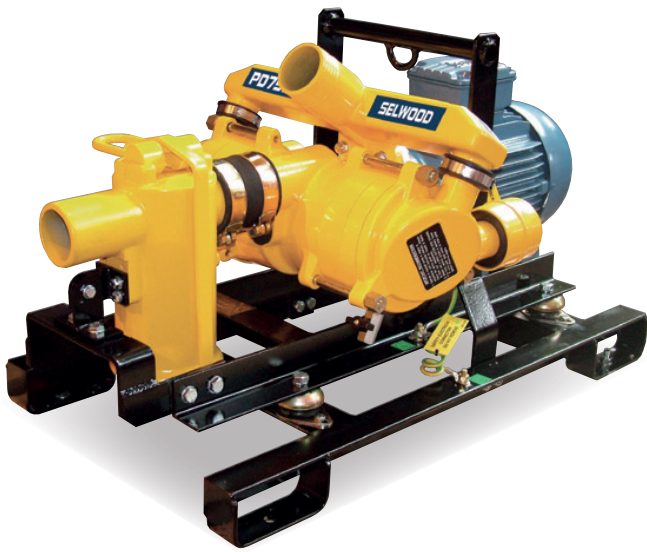

TECHNICAL SPECIFICATIONS

| | |
|--------------------|--------------------------|
| Model | Spate PD 75 |
| Nameplate Capacity | 30 m ³ /h |
| Total Head Lift | 40m |
| Delivery Head | 30.5m |
| Suction Lift | 9.1m |
| Self-Priming Lift | 8.8m |
| Dimensions (LxWxH) | 950 mm x 520 mm x 530 mm |
| Solids Size (max.) | 6 mm |
| Engine / Motor | 3kW 400/3/50 |
| Engine Speed | 1450 rpm |
| Emission Rating | IE3 |
| Inlet/Outlet Port | 3" Camlock |

TECHNICAL DATA

The pump is driven by an electric motor mounted on a 2-wheel site chassis. The pump's body is made of marine-grade aluminium. Non-turbulent flows for viscous liquids, used for oil spill response, recovery and clean-up operations worldwide. Simplicity of design and construction provide for total ease of maintenance. Selwood manufactured pumps, synonymous with quality, longevity and reliability, are operating across the world in some of the most challenging environments and demanding of projects.

KEY FEATURES:

- Oil Tolerant Nitrile seals
- Spigot suction & discharge
- Mounted on a 2-wheel site chassis
- Stone Catcher
- Transfers a range of viscosities
- Light-weight, compact and easily transported
- Pairs with a variety of oil spill response equipment
- World-renowned performance

PUMP APPLICATIONS:

- Liquid Transfer
- Dewatering
- Lightering

EQUIPMENT OPTIONS:

- WEG IE3 Motor direct drive 3kW 415/3/50 @ 1450rpm
- Skimmer
- Temporary Storage
- Transfer Hoses

